



Roles Guide

Contents

Definitions	3
Integrator	4
Customer	5
Roles	6
User Levels	7
Roles and Camera Permissions	8

Integrator Level users:

- **Integrator** is a partner who has the ability to connect new Customers to 3dEYE services. This is a top level user, has control over all other types of users. Can create new users, modify existing users and set permissions to control access to the Admin and Video portals.
- **Manager** can be either program or billing administrator and performs duties as assigned by integrator to help with customer management.

Note: these users can not login into Video portal.

Customer Level users:

- **Customer** is the owner of the cameras and equipment who wants to connect his equipment to 3dEYE services.
- **Admin** is a user with access to Admin portal. Can view and configure cameras and alerts settings according to assigned role. Can add new cameras.
- **Guard** is a user without access to Admin portal. Can only view assigned cameras through web-interface or mobile app, create clips, use PTZ controls and/or share cameras with others according to assigned role.

- **Role** determine cameras and camera functions that a Customer Level user can access and/or control. One camera can be added to multiple roles and different permission can be set for each camera parameter under each role. There are two role types Admin and Guard. One user can have multiple roles but only of the same type.

Integrator

[Back to contents](#)[Last viewed page](#)

4

[Previous page](#)[Next page](#)

Dashboard Customers Managers Cameras Alerts Logs Api Keys

EN User Name

Customers

Create

Active Customers Deleted Customers

Show 50 entries Reset filters Columns Reset settings Refresh


ID	Enabled	Company name	Customer email	Address	Customer type
ID		ca	Customer email	Address	All types
151	⊘	Company Communications	info@company.ca	CA, Ontario	Customer
215	⊘	Customer B	info@customerB.com	New-York, USA	Customer
103	✓	Integrator A	info@integrator.ca	CA, Alberta	Integrator
113	✓	Integrator B	info@ab.cd	address	Integrator
132	⊘	Integrator C	info@ab.cd	US, Texas	Integrator
135	✓	Integrator D	info@ab.cd	Lima District, Peru, Peru	Integrator

Showing 1 to 12 of 12 entries (filtered from 112 total entries)

Previous 1 Next

3dEYE Inc.
v. 1.0.1940

- Integrator is the top level user, can manage all other users.
- Integrator can connect new integrators and customers.
- For Customer type users integrator can manage all cameras for all roles.
- For Integrator type users can manage users assigned to this integrator including sub-integrators and customers but can not access camera that are integrated under Customer type users of this integrator.
- Integrator can limit access to Admin portal for Customer type users.
- Integrator can restrict P&P camera integration for selected customers.

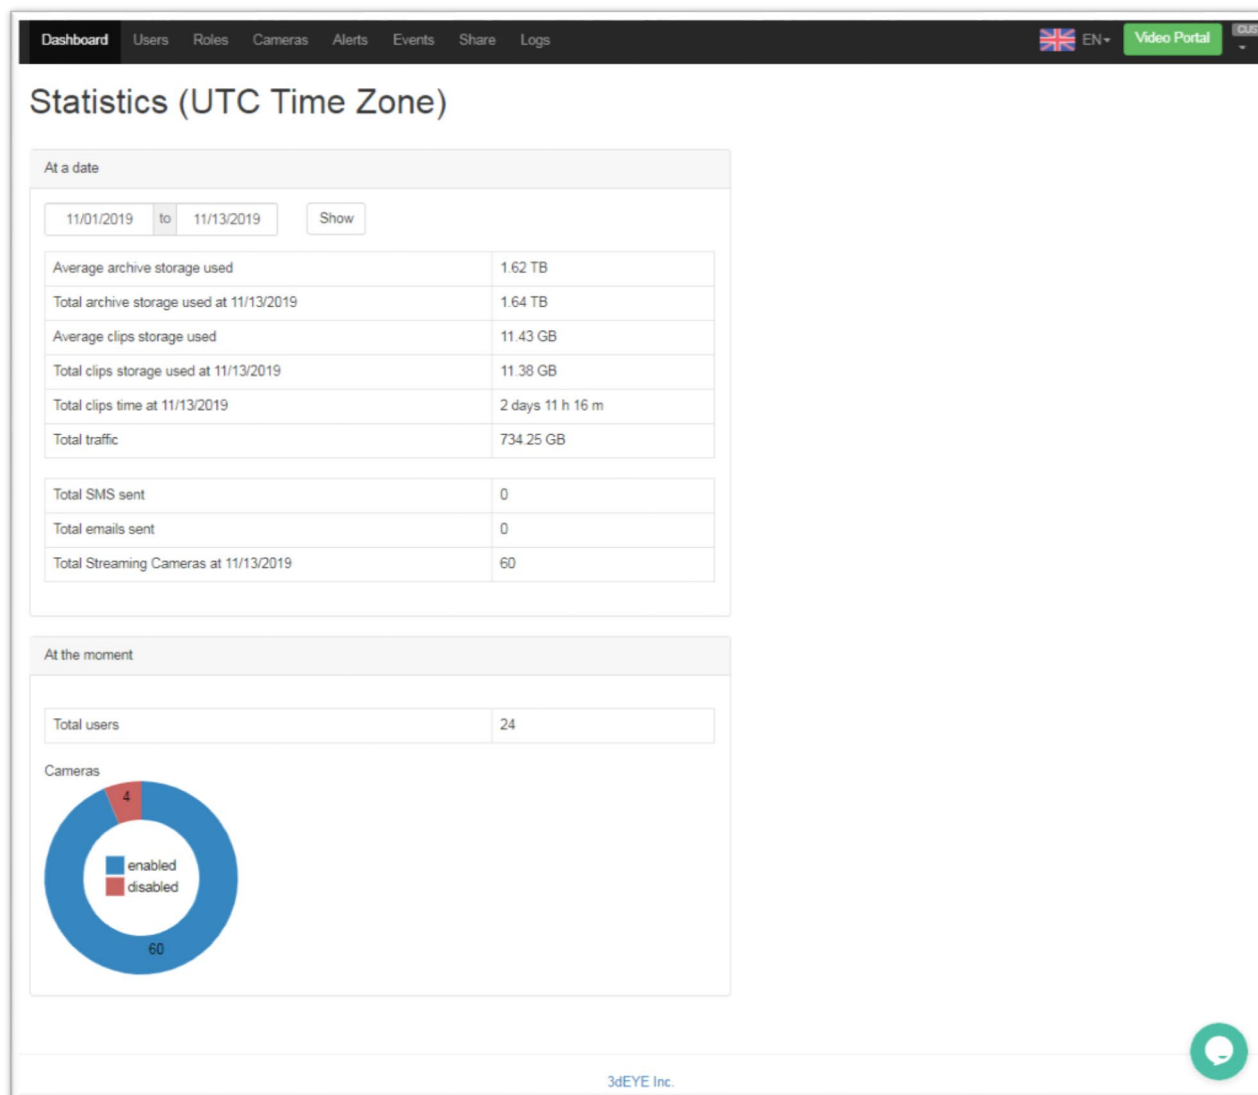

- Customer can create Admin and Guard type users.
- Can add new cameras to platform.
- Can modify existing cameras and users.
- Can create sensor and system alerts.
- Can modify permissions set for Admin and Guard users.
- Can delete cameras and users.

Note: Customer access to Admin portal can be restricted by integrator.

Roles

[Back to contents](#)[Last viewed page](#)

6

[Previous page](#)[Next page](#)

Manage role "Demo mix" ×

[Cameras](#) [Settings](#) [Users](#) [Delete](#)

Exclude Cameras assigned to these Roles:

Include Cameras assigned to these Roles:

[Reset filters](#) [Columns ▾](#) [Reset settings](#)

Selected ☐ ID ☐ Camera name ☐ Global permissions ▾

	ID	Camera name	Any permissions
☒	13034	cam 2	View Share PTZ Update & Delete Save Clip
☒	17798	Cam 3	View Share PTZ Update & Delete Save Clip
☒	13038	cam 4	View Share PTZ Update & Delete Save Clip
☒	14994	cam 5	View Share PTZ Update & Delete Save Clip
☒	15926	NAM Cam 04	View Share PTZ Update & Delete Save Clip
☒	15940	NAM Cam 05	View Share PTZ Update & Delete Save Clip
☒	14039	NAM Cam 06	View Share PTZ Update & Delete Save Clip
☐	15965	NAM Cam 08	View Share PTZ Update & Delete Save Clip
☐	15942	NAM Cam 09	View Share PTZ Update & Delete Save Clip
☐	15938	NAM Cam 10	View Share PTZ Update & Delete Save Clip
☒	15907	NAM Cam 11	View Share PTZ Update & Delete Save Clip
☒	15905	NAM Cam 16	View Share PTZ Update & Delete Save Clip

Selected: 11, Total: 64


[Save](#) [Cancel](#)

- There are two types of Roles: Admin type can access admin portal and video portal; Guard type can access only video portal.
- Roles determine what cameras user can view and manage.
- Each camera has 5 permissions that can assigned with a role:
 1. View – allows user to view camera in video portal.
 2. Share – allows user to share camera with others via share link or widget.
 3. PTZ – allows user to use PTZ controls on PTZ enabled cameras.
 4. Update & Delete – allows admin user to modify camera settings and delete camera from the platform.
 5. Save Clip – allows user to save, download and delete clips form Library.
- Same Role can be assigned to multiple users.
- One user can have multiple Roles assigned to him, all roles have to be of the same type.

User Levels

[Back to contents](#)[Last viewed page](#)

7

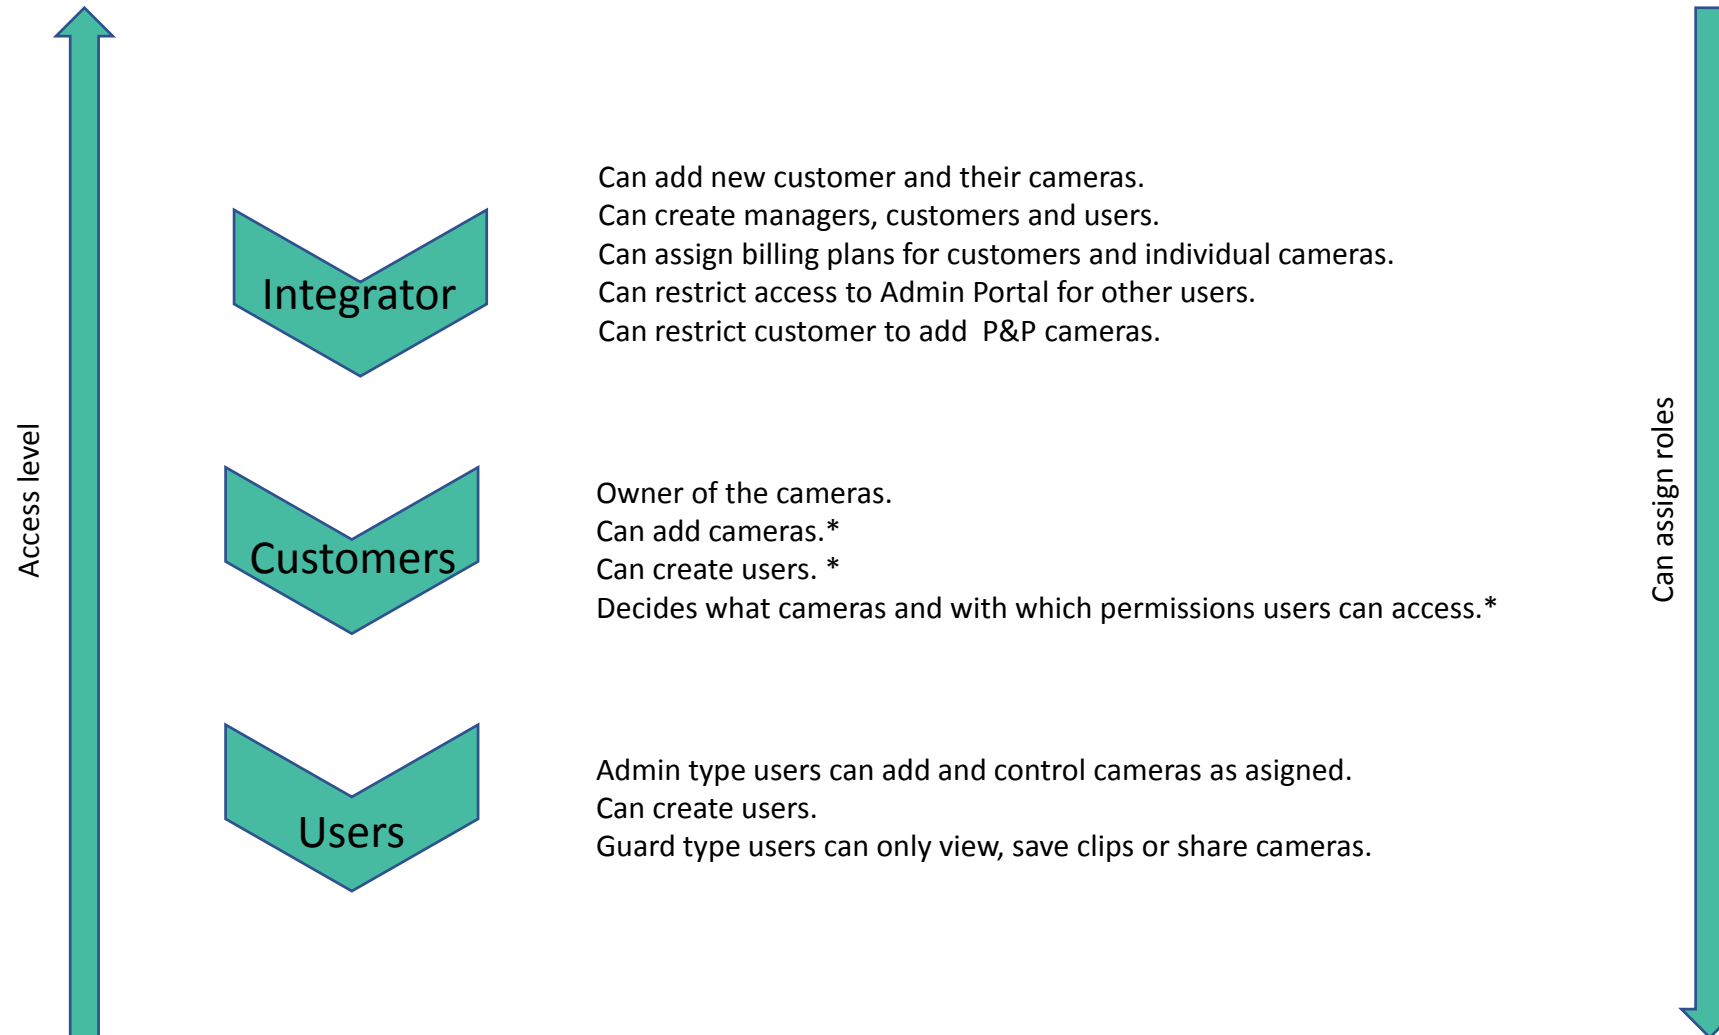[Previous page](#)[Next page](#)

* Unless integrator restricted access to Admin Portal.

Roles and Camera Permissions

Each camera has 5 permissions that can be assigned to a role, the role is then assigned to a user granting access to the specified camera and select functions.

